



www.fmindustrial.es

HOSTELRY - PROFESSIONAL BAKERY


2022



ΒΙ.ΠΕ. Μεγάρων, 19100 Μέγαρο, ΤΗλ 22960 80086 - 80087 email: sales@moraitis.gr
www.moraitis.gr

follow us on:



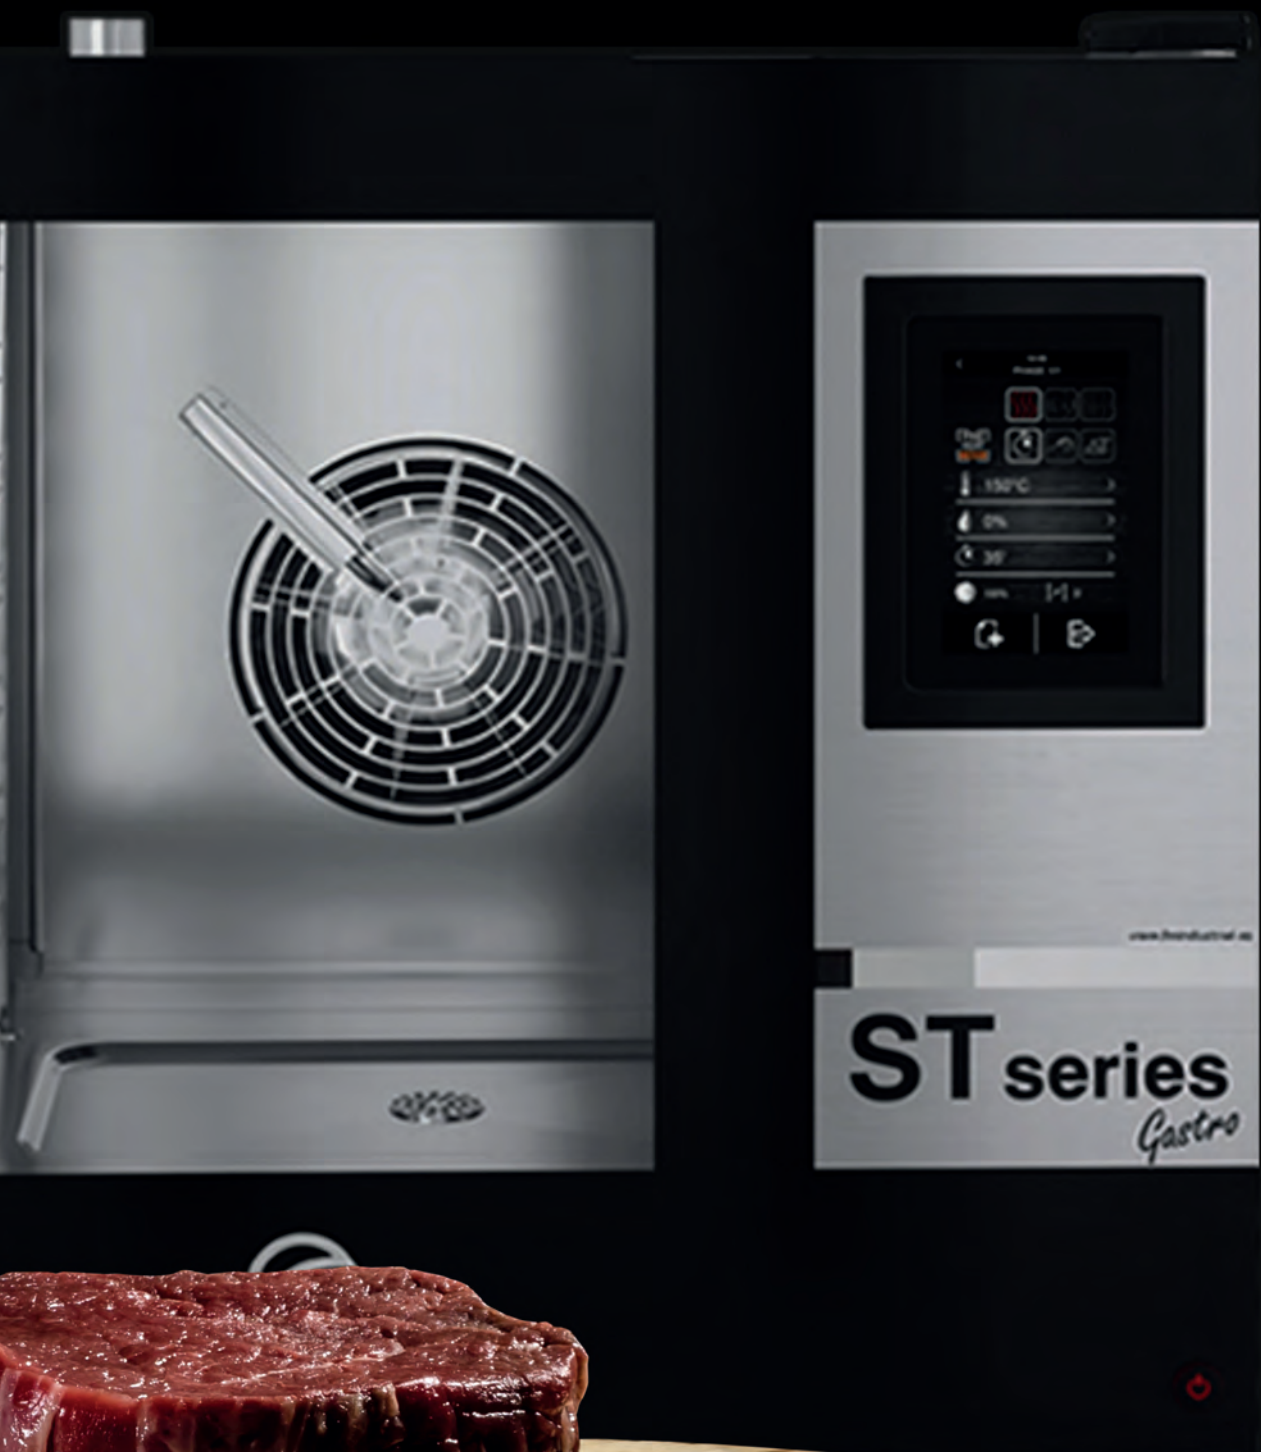

ST series
Gastro



- Manual control panel system.
- User friendly.
- Rotation inverter.
- End of cycle alarm.
- Door switch.
- Safety Thermostat.
- Interior LED light.
- ¾" Water connection.
- Easy to clean folding glass.
- 0 to 100 % humidity regulation.
- 0 - 120 minute timer and non-stop mode.
- Chimney manual control.
- Electric or gas (premix burner).
- Available with Gastronorm GN and 600x400 Pastry-Bakery trays.



- Digital display and encoder for regulation in control panel system.
- User friendly.
- Rotation inverter.
- End of cycle alarm.
- Door switch.
- Safety Thermostat.
- Interior LED light.
- 3/4" Water connection.
- Chimney manual control.
- Two speed engine.
- Direct vaporization push button.
- Easy to clean folding glass.
- 0 to 100 % humidity regulation.
- 0 - 120 minute timer and non-stop mode.
- Available with Gastronorm GN trays.



- Digital display in control panel system.
- User friendly touch screen.
- Rotation inverter.
- End of cycle alarm.
- Door switch.
- Safety Thermostat.
- Interior LED light.
- 3/4" Water connection.
- Easy to clean folding glass.
- Clima Control - % Humidity regulation
- % Step Speed control
- Steam Control - Programmable chimney
- 3 Cooking modes: dry heat, vapour and mixed.
- Core Probe, Vacuum Probe and Multipoint Probe.
- Cooking control using time, Core Probe or Delta T.
- 99 Cooking programs with 6 cooking stages each one.
- Multicook / All on Time.
- Regeneration / Maintain food temperature.
- User-configurable cooking book with pictures.
- Electric or gas (premix burner)
- Available with Gastronorm GN and 600x400 Pastry-Bakery trays.

FEATURES-EQUIPMENT



PREMIX GAS BURNERS

This new combustion control system, equipped in all our gas ovens, allows an increase in efficiency, decreases fuel consumption, a more homogeneous heat distribution and, at the same time, simplifies maintenance interventions.

HACCP

HACCP

Available needed data log to meet HACCP requirements.



RECIPE BOOK

Our digital models include a customizable user's recipe book with 48 programs and up to six cooking phases on each one. Some models include a recipe book with pictures and recipes preset as standard. This recipe book can be edited and personalised for each customer.



COOKING PHASES

Setting cooking stage by stage makes possible to configure temperature and humidity in the same cooking cycle. This feature makes possible to cook the food and sear or gratin at the end of the process.



PLANNING

With the planning we will be able to program the automatic ignition of the oven and elaborate a recipe preset previously optimizing working times and without the need to be present to start the cooking process.



CLIMA CONTROL

With the CLIMA CONTROL system we will control the perfect climate inside the cooking chamber to achieve the desired finish of the food and without the need to select cooking modes previously, resulting in simple and uncomplicated processes in the elaboration of recipes. Just choose time, temperature and humidity and the system will do the rest.

FEATURES-EQUIPMENT



SELF-CLEANING

Automatic washing system of the oven through specific detergent and rinse aid. Thereby, your oven will always be as good as new.



FAN Control-Adjustable Speed

Thanks to the fan speed regulation feature (up to 10 speeds), any kind of recipe can be prepared, even the delicate ones. In addition, the rotation inverter provides uniform cooking results.



STEAM CONTROL

Steam control system allows a programmed flow of fumes out of the cooking chamber, managing to keep or reduce humidity inside it. As a result, homogenously seared, perfect roasted or gratinated dishes are possible.



MULTICOOK

This system allows us to cook different foods with different cooking times by notifying us as the trays are ready to be removed.



ALL ON TIME

This system allows us to cook different foods with different cooking times, but finishing all at the same time. To do so, the oven tells us when to insert each tray. The result is the completion of all foods at the same time.



CORE PROBE, MULTIPOINT PROBE AND VACUUM PROBE



Obtain the desired cooking thanks to the precise read and control of temperature in 3 different points of the product, no matter the size of it. A special Core Probe, with a diameter of just 1.5 mm, allows controlling temperature inside the food without interfering the vacuum process.



CONNECTIVITY 4.0

*Control, create or modify
your recipe everywhere at any time.*



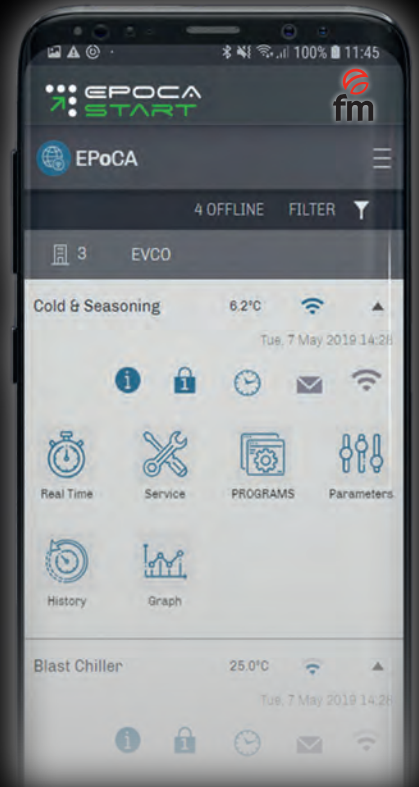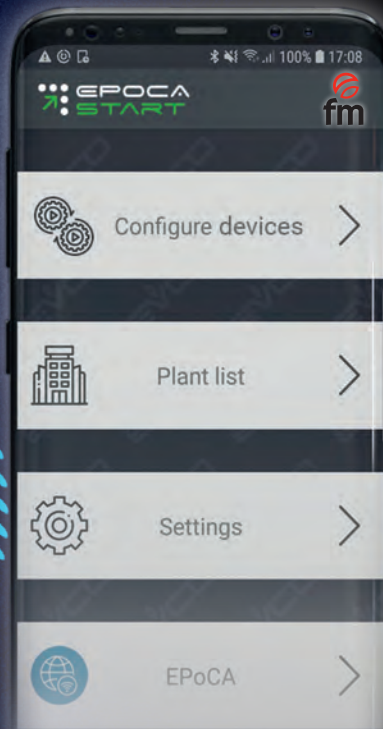







ST *Compact*






STC 423 E

PVP 3.948 €





Reference	710457
Internal dimensions	(W)385 x (D)385x (H)302 mm
External dimensions	(W)530 x (D)600 x (H)580 mm
 Electric power	3.700 W
 Maximum temperature	250°
 Weight	49 Kg
 Voltage	230 V - 50/60 Hz
Connection	Single phase Schuko
8 Trays capacity	GN 2/3 20 mm depth
4 Trays capacity	GN 2/3 40 mm depth
3 Trays capacity	GN 2/3 65 mm depth

Longitudinal tray position




STC 423 V5

PVP 5.928 €

Reference	710458
Internal dimensions	(W)385 x (D)385 x (H)302 mm
External dimensions	(W)530 x (D)620 x (H)580 mm
 Electric power	3.700 W
 Maximum temperature	270°
 Weight	57 Kg.
 Voltage	230 V - 50/60 Hz
Connection	Single phase Schuko
Automatic washing	standard
Multipoint probe	standard
Change door opening	400 €
Wifi connection Ref. 710789	255 €
8 Trays capacity	GN 2/3 20 mm depth
4 Trays capacity	GN 2/3 40 mm depth
3 Trays capacity	GN 2/3 65 mm depth





Longitudinal tray position






STC 411 E

PVP 4.093€





Reference	710459
Internal dimensions	(W)385 x (D)560 x (H)302 mm
External dimensions	(W)530 x (D)775 x (H)580 mm
 Electric power	5.700 W
 Maximum temperature	250°
 Weight	59 Kg
 Voltage	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
8 Trays capacity	GN 1/1 20 mm depth
4 Trays capacity	GN 1/1 40 mm depth
3 Trays capacity	GN 1/1 65 mm depth

Longitudinal tray position




STC 411 V5

PVP 6.100 €

Reference	710661
Internal dimensions	(W)385 x (D)560 x (H)302 mm
External dimensions	(W)530 x (D)795 x (H)580 mm
 Electric power	5.700 W
 Maximum temperature	270°
 Weight	66 Kg.
 Voltage	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	standard
Multipoint probe	standard
Change door opening	400 €
Wifi connection Ref. 710789	255 €
8 Trays capacity	GN 1/1 20 mm depth
4 Trays capacity	GN 1/1 40 mm depth
3 Trays capacity	GN 1/1 65 mm depth





Longitudinal tray position






STC 411 EW

PVP 4.138 €





Reference	710460
Internal dimensions	(W)560 x (D)385 x (H)302 mm
External dimensions	(W)720 x (D)600 x (H)580 mm
 Electric power	5.700 W
 Maximum temperature	250°
 Weight	60 Kg.
 Voltage	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
8 Trays capacity	GN 1/1 20 mm depth
4 Trays capacity	GN 1/1 40 mm depth
3 Trays capacity	GN 1/1 65 mm depth

Transverse tray position




STC 411 V5 W

PVP 6.190 €

Reference	710462
Internal dimensions	(W)560 x (D)385 x (H)302 mm
External dimensions	(W)720 x (D)620 x (H)580 mm
 Electric power	5.700 W
 Maximum temperature	270°
 Weight	66 Kg.
 Voltage	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	standard
Multipoint probe	standard
Change door opening	400 €
Wifi connection Ref. 710789	255 €
8 Trays capacity	GN 1/1 20 mm depth
4 Trays capacity	GN 1/1 40 mm depth
3 Trays capacity	GN 1/1 65 mm depth





Transverse tray position






STC 611 E

PVP 4.539 €





Reference	710463
Internal dimensions	(W)385 x (D)560 x (H)385 mm
External dimensions	(W)530 x (D)775 x (H)665 mm
 Electric power	7.200 W
 Maximum temperature	250°
 Weight	62 Kg
 Voltage	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
11 Trays capacity	GN 1/1 20 mm depth
6 Trays capacity	GN 1/1 40 mm depth
4 Trays capacity	GN 1/1 65 mm depth

Longitudinal tray position




STC 611 V5

PVP 6.625 €

Reference	710465
Internal dimensions	(W)385 x (D)560 x (H)385 mm
External dimensions	(W)530 x (D)795 x (H)665 mm
 Electric power	7.200 W
 Maximum temperature	270°
 Weight	70 Kg.
 Voltage	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	standard
Multipoint probe	standard
Change door opening	400 €
Wifi connection Ref. 710789	255 €
11 Trays capacity	GN 1/1 20 mm depth
6 Trays capacity	GN 1/1 40 mm depth
4 Trays capacity	GN 1/1 65 mm depth





Longitudinal tray position





STC 611 EW

PVP 4.416 €





Reference	710464
Internal dimensions	(W)560 x (D)385 x (H)385 mm
External dimensions	(W)720 x (D)600 x (H)665 mm
 Electric power	7.200 W
 Maximum temperature	250°
 Weight	62 Kg.
 Voltage	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
11 Trays capacity	GN 1/1 20 mm depth
6 Trays capacity	GN 1/1 40 mm depth
4 Trays capacity	GN 1/1 65 mm depth

Transverse tray position



STC 611 V5 W

PVP 6.446 €

Reference	710466
Internal dimensions	(W)560 x (D)385 x (H)385 mm
External dimensions	(W)720 x (D)620 x (H)665 mm
 Electric power	7.200 W
 Maximum temperature	270°
 Weight	70 Kg.
 Voltage	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	standard
Multipoint probe	standard
Change door opening	400 €
Wifi connection Ref. 710789	255 €
11 Trays capacity	GN 1/1 20 mm depth
6 Trays capacity	GN 1/1 40 mm depth
4 Trays capacity	GN 1/1 65 mm depth





Transverse tray position






STC 1011 E

PVP 5.376 €





Reference	710467
Internal dimensions	(W)385 x (D)560 x (H)605 mm
External dimensions	(W)530 x (D)775 x (H)885 mm
 Electric power	11.400 W
 Maximum temperature	250°
 Weight	84 Kg.
 Voltage	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
19 Trays capacity	GN 1/1 20 mm depth
10 Trays capacity	GN 1/1 40 mm depth
6 Trays capacity	GN 1/1 65 mm depth

Longitudinal tray position




STC 1011 V5

PVP 7.528 €

Reference	710469
Internal dimensions	(W)385 x (D)560 x (H)605 mm
External dimensions	(W)530 x (D)795 x (H)885 mm
 Electric power	11.400 W
 Maximum temperature	270°
 Weight	95 Kg.
 Voltage	400 V - 50/60 Hz
Connection	Trifásico 3F + N + T
Automatic washing	standard
Multipoint probe	standard
Change door opening	400 €
Wifi connection Ref. 710789	255 €
19 Trays capacity	GN 1/1 20 mm depth
10 Trays capacity	GN 1/1 40 mm depth
6 Trays capacity	GN 1/1 65 mm depth





Longitudinal tray position






STC 1011 EW

PVP 5.264 €





Reference	710468
Internal dimensions	(W)385 x (D)560 x (H)605 mm
External dimensions	(W)720 x (D)600 x (H)885 mm
 Electric power	11.400 W
 Maximum temperature	270°
 Weight	85 Kg.
 Voltage	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
19 Trays capacity	GN 1/1 20 mm depth
10 Trays capacity	GN 1/1 40 mm depth
6 Trays capacity	GN 1/1 65 mm depth

Transverse tray position




STC 1011 V5 W

PVP 7.628 €

Reference	710470
Internal dimensions	(W)560 x (D)385 x (H)605 mm
External dimensions	(W)720 x (D)620 x (H)885 mm
 Electric power	11.400 W
 Maximum temperature	270°
 Weight	95 Kg.
 Voltage	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	standard
Multipoint probe	standard
Change door opening	400 €
Wifi connection Ref. 710789	255 €
19 Trays capacity	GN 1/1 20 mm depth
10 Trays capacity	GN 1/1 40 mm depth
6 Trays capacity	GN 1/1 65 mm depth

Transverse tray position



ACCESSORIES



STANDS

MODEL REFERENCE

DIMENSIONS

COMPATIBLE MODELS

PRICE



ST-C 650 B

Ref. 710475

(W)490 x (D)495 x (H)650 mm

423 E
423 V5

775 €

N° Guides - 7

ST-C 850 B

Ref. 710476

(W)490 x (D)495 x (H)850 mm

423 E
423 V5

860 €

N° Guides - 10

ST-C 200

Ref. 710471

(W)490 x (D)670 x (H)200 mm

411E / 611E / 1011 E
411V5 / 611V5 / 1011 V5

535 €

N° Guides - 0

ST-C 400

Ref. 710472

(W)490 x (D)670 x (H)400 mm

411E / 611E / 1011 E
411V5 / 611V5 / 1011 V5

613 €

N° Guides - 0



ST-C 650

Ref. 710473

(W)490 x (D)670 x (H)650 mm

411E / 611E / 1011 E
411V5 / 611V5 / 1011 V5

790 €

N° Guides - 7

ST-C 850

Ref. 710474

(W)490 x (D)670 x (H)850 mm

411E / 611E / 1011 E
411V5 / 611V5 / 1011 V5

870 €

N° Guides - 10

STC 200 W

Ref. 710477

(W)700 x (D)495 x (H)200 mm

411 EW / 611 EW / 1011 EW
411 V5W / 611 V5W / 1011 V5W

535 €

N° Guides - 0

STC 400 W

Ref. 710478

(W)700 x (D)495 x (H)400 mm

411 EW / 611 EW / 1011 EW
411 V5W / 611 V5W / 1011 V5W

613 €

N° Guides - 0

STC 650 W

Ref. 710479

(W)700 x (D)495 x (H)650 mm

411 EW / 611 EW / 1011 EW
411 V5W / 611 V5W / 1011 V5W

780 €

N° Guides - 7

STC 850 W

Ref. 710480

(W)700 x (D)495 x (H)850 mm

411 EW / 611 EW / 1011 EW
411 V5W / 611 V5W / 1011 V5W

880 €

N° Guides - 10



Ref. 710286

Wheeled option

150 €

ACCESSORIES



HOODS



Includes:
- Extraction motor
- Fumes condenser

MODEL REFERENCE	DIMENSIONS	COMPATIBLE MODELS	PRICE
STC-2/3 Ref. 710482	(W)530 x (D)750 x (H)235 mm	423 E 423 V5	2.169 €
STC-2/3 DUO Ref. 710701	(W)530 x (D)750 x (H)235 mm	423 E 423 V5	2.300€
STC-1/1 Ref. 710481	(W)530 x (D)915 x (H)235 mm	411E / 611E /1011 E 411V5 / 611V5 / 1011 V5	2.240 €
STC-1/1 DUO Ref. 710702	(W)530 x (D)915 x (H)235 mm	411E / 611E /1011 E 411V5 / 611V5 / 1011 V5	2.415 €
STC-W 1/1 Ref. 710483	(W)720 x (D)750 x (H)235 mm	411 EW / 611 EW /1011 EW 411 V5W / 611 V5W /1011 V5W	2.280 €
STC-W 1/1 DUO Ref. 710703	(W)720 x (D)750 x (H)235 mm	411 EW / 611 EW /1011 EW 411 V5W / 611 V5W / 1011 V5W	2.440 €

Fumes outlet connection ø 120 mm.

FUMES CONDENSER KIT



MODEL REFERENCE	DIMENSIONS	COMPATIBLE MODELS	PRICE
STC-2/3 Ref. 710712	(W)530 x (D)330 x (H)235 mm	423 E 423 V5	859 €
STC-2/3 DUO Ref. 710713	(W)530 x (D)330 x (H)235 mm	423 E 423 V5	1.050 €
STC Ref. 710487	(W)530 x (D)475 x (H)235 mm	411E / 611E /1011 E 411V5 / 611V5 / 1011 V5	859 €
STC DUO Ref. 710714	(W)530 x (D)475 x (H)235 mm.	411E / 611E /1011 E 411V5 / 611V5 / 1011 V5	1080 €
STC-W 1/1 Ref. 710488	(W)720 x (D)330 x (H)235 mm	411 EW / 611 EW /1011 EW 411 V5W / 611 V5W /1011 V5W	859 €
STC-W 1/1 DUO Ref. 710715	(W)720 x (D)330 x (H)235 mm	411 EW / 611 EW /1011 EW 411 V5W / 611 V5W / 1011 V5W	1050 €

SUPERPOSITION KIT



MODEL REFERENCE	DIMENSIONS	COMPATIBLE MODELS	PRICE
ST-2/3 Ref. 710485	(W)530 x (D)625 x (H)80 mm	423 E / 423 V5	570 €
ST-1/1 Ref. 710484	(W)530 x (D)800 x (H)80 mm	411E / 611E /1011 E 411V5 / 611V5 / 1011 V5	570 €
ST-W 1/1 Ref. 710486	(W)720 x (D)625 x (H)80 mm	411 EW / 611 EW /1011 EW 411 V5W / 611 V5W / 1011 V5W	570 €



The logo for FM Industrial, featuring a stylized 'f' and 'm' with a leaf-like graphic above the 'm'.







ST *Gastro*






STG 51 M

PVP 4.100 €





Reference	710777
Internal dimensions	(W)620 x (D)405 x (H)410 mm
External dimensions	(W)790 x (D)795 x (H)688 mm
 Electric power	7.650W
 Maximum temperature	250°
 Weight	77 Kg.
 Voltage	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
5 Trays capacity	GN 1/1
Distance between trays	67 mm.

Transverse tray position




STG 51 V7

PVP 7.170 €

Reference	710778
Internal dimensions	(W)620 x (D)405 x (H)410 mm
External dimensions	(W)790 x (D)795 x (H)688 mm
 Electric power	7,750 W
 Maximum temperature	270°
 Weight	86 Kg
 Voltage	400 V - 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	standard
Multipoint probe	standard
Change door opening	400 €
Wifi connection Ref. 710789	255 €
5 Trays capacity	GN 1/1
Distance between trays	67 mm.





Transverse tray position






STG 71 M

PVP 4.495 €





Reference	710557
Internal dimensions	(W)620 x (D)405 x (H)545 mm
External dimensions	(W)790 x (D)790 x (H)825 mm
 Electric power	10.200 W
 Maximum temperature	250°
 Weight	89 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
7 Trays capacity	GN 1/1
Distance between trays	67 mm.

Transverse tray position




STG 71 V7

PVP 7.370 €

Reference	710558
Internal dimensions	(W)620 x (D)405 x (H)545 mm
External dimensions	(W)790 x (D)790 x (H)825 mm
 Electric power	10.200 W
 Maximum temperature	270°
 Weight	94 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	standard
Multipoint probe	standard
Change door opening	400 €
Wifi connection Ref. 710789	255 €
7 Trays capacity	GN 1/1
Distance between trays	67 mm.





Transverse tray position






STG 111 M

PVP 5.565 €





Reference	710561
Internal dimensions	(W)620 x (D)405 x (H)810 mm
External dimensions	(W)790 x (D)790 x (H)1090 mm
 Electric power	18.500 W
 Maximum temperature	250°
 Weight	114 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
11 Trays capacity	GN 1/1
Distance between trays	67 mm.

Transverse tray position



STG 111 V7

PVP 8.750 €

Reference	710562
Internal dimensions	(W)620 x (D)405 x (H)810 mm
External dimensions	(W)790 x (D)790 x (H)1090 mm
 Electric power	18.500 W
 Maximum temperature	270°
 Weight	127 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	standard
Multipoint probe	standard
Change door opening	400 €
Wifi connection Ref. 710789	255 €
11 Trays capacity	GN 1/1
Distance between trays	67 mm.





Transverse tray position





STG 201 ET

PVP 14.380 €




Reference	710565
Internal dimensions	(W)700 x (D)500 x (H)1480 mm
External dimensions	(W)880 x (D)915 x (H)1865 mm
 Electric power	26.250 W
 Maximum temperature	250°
 Weight	252 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
Trolley	standard
20 Trays capacity	GN 1/1
Distance between trays	67 mm.

Transverse tray position




STG 201 V7 T

PVP 17.640 €

Reference	710566
Internal dimensions	(W)700 x (D)500 x (H)1480 mm
External dimensions	(W)880 x (D)915 x (H)1865 mm
 Electric power	26.250 W
 Maximum temperature	270°
 Weight	260 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	standard
Multipoint probe	standard
Trolley	standard
Change door opening	400 €
Wifi connection Ref. 710789	255 €
20 Trays capacity	GN 1/1
Distance between trays	67 mm.





Transverse tray position





STG 72 V7

PVP 9.130 €

Reference	710568
Internal dimensions	(W)620 x (D)730 x (H)545 mm
External dimensions	(W)790 x (D)1220 x (H)825 mm
 Electric power	14.200 W
 Maximum temperature	270°
 Weight	136 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	standard
Multipoint probe	standard
Wifi connection Ref. 710789	400 €
Change door opening	255 €
7 Trays capacity	GN 2/1 / (14) GN 1/1
Distance between trays	67 mm.





Longitudinal tray position GN2/1
Transverse tray position GN 1/1






STG 112 V7

PVP 10.850 €





Reference	710570
Internal dimensions	(W)620 x (D)730 x (H)810 mm
External dimensions	(W)790 x (D)1220 x (H)1090 mm
 Electric power	28.500 W
 Maximum temperature	270°
 Weight	178 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	standard
Multipoint probe	standard
Change door opening	400 €
Wifi connection Ref. 710789	255 €
11 Trays capacity	GN 2/1 / (22) GN 1/1
Distance between trays	67 mm.

Longitudinal tray position GN2/1
Transverse tray position GN 1/1





STG 202 V7 T PVP 19.570 €

Reference	710572
Internal dimensions	(W)700 x (D)740 x (H)1480 mm
External dimensions	(W)880 x (D)1180 x (H)1865 mm
 Electric power	46.250 W
 Maximum temperature	270°
 Weight	270 kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	standard
Multipoint probe	standard
Trolley	standard
Change door opening	400 €
Wifi connection Ref. 710789	255 €
20 Trays capacity	GN 2/1 / (40) GN 1/1
Distance between trays	67 mm.

Longitudinal tray position GN2/1
Transverse tray position GN 1/1





www.fmindustrial.es



ACCESSORIES



STANDS	MODEL REFERENCE	DIMENSIONS	COMPATIBLE MODELS	PRICE
	STG 300 Ref. 710574 N° Guides - 0	(W)715 x (D)640 x (H)300 mm	51 M / 71 M / 111 M 71 M GAS / 111 M GAS 51 V7 / 71 V7 / 111 V7 71 V7 GAS / 111 V7 GAS	535 €
	STG 650 Ref. 710575 N° Guides - 6	(W)715 x (D)640 x (H)650 mm	51 M / 71 M / 111 M 71 M GAS / 111 M GAS 51 V7 / 71 V7 / 111 V7 71 V7 GAS / 111 V7 GAS	900 €
	STG 850 Ref. 710576 N° Guides - 8	(W)715 x (D)640 x (H)850 mm	51 M / 71 M / 111 M 71 M GAS / 111 M GAS 51 V7 / 71 V7 / 111 V7 71 V7 GAS / 111 V7 GAS	1037 €
	STG 300 2/1 Ref. 710577 N° Guides - 0	(AW)715 x (D)1040 x (H)300 mm	72 V7 / 112 V7 72 V7 GAS / 112 V7 GAS	650 €
	STG 650 2/1 Ref. 710578 N° Guides - 6	(W)715 x (D)1040 x (H)650 mm	72 V7 / 112 V7 72 V7 GAS / 112 V7 GAS	990 €
	STG 850 2/1 Ref. 710579 N° Guides - 8	(W)715 x (D)1040 x (H)850 mm	72 V7 / 112 V7 72 V7 GAS / 112 V7 GAS	1165 €
	Ref. 710286	Wheeled option		150 €

ACCESSORIES



HOODS



Includes:

- Extraction motor
- Fumes condenser

MODEL REFERENCE	DIMENSIONS	COMPATIBLE MODELS	PRICE
STG Ref. 710581	(W)790 x (D)840 x (H)230 mm	51 M / 71 M / 111 M 51 V7 / 71 V7 / 111 V7	2.236 €
STG DUO Ref. 710704	(W)790 x (D)840 x (H)230 mm	51 M / 71 M / 111 M 51 V7 / 71 V7 / 111 V7	2.550 €
STG 201 Ref. 710582	(W)880 x (D)1020 x (H)300 mm	201 ET / 201 V7 T	2.490 €
STG 2/1 Ref. 710583	(W)790 x (D)1270 x (H)300 mm	72 V7 / 112 V7	2.790 €
STG 202 Ref. 710627	(W)880 x (D)1285 x (H)300 mm	202 V7 T	2.970 €

Fumes outlet connection ø 120 mm.

FUMES CONDENSER KIT



MODEL REFERENCE	DIMENSIONS	COMPATIBLE MODELS	PRICE
STG Ref. 710584	(W)790 x (D)335 x (H)230 mm	51 M / 71 M / 111 M 51 V7 / 71 V7 / 111 V7 201 ET / 201 V7 T	860 €
STG DUO Ref. 710716	(W)790 x (D)335 x (H)230 mm	51 M / 71 M / 111 M 51 V7 / 71 V7 / 111 V7	1040 €
STG 2/1 Ref. 710585	(W)790 x (D)490 x (H)230 mm	72 V7 / 112 V7	965 €

SUPERPOSITION KIT



MODEL REFERENCE	DIMENSIONS	COMPATIBLE MODELS	PRICE
STG Ref. 710586	(W)790 x (D)770 x (H)100 mm	51 M / 71 M / 111 M 51 V7 / 71 V7 / 72 V7 / 111 V7	570 €
STG ELECTRIC/GAS Ref. 710699	(W)790 x (D)875 x (H)100 mm	71 M GAS / 111 M GAS 71 V7 GAS / 72 V7 GAS 111 V7 GAS	590 €







PROVERS





F 408





PVP 1.320 €

Reference	710603
Internal dimensions	(W)490 x (D)560 x (H)650 mm
External dimensions	(W)640 x (D)640 x (H)975 mm
 Electric power	700 W
 Maximum temperature	85° C
 Weight	35 Kg.
 Voltage	230 V - 50/60 Hz
Connection	Single phase Schuko
Capacity 8 trays	480x340
Distance between trays	80 mm.



F 608

PVP 1.465 €





Reference	710604
Internal dimensions	(W)610 x (D)645 x (H)650 mm
External dimensions	(W)820 x (D)700 x (H)975 mm
 Electric power	1.400 W
 Maximum temperature	85° C
 Weight	42 Kg.
 Voltage	230 V - 50/60 Hz
Connection	Single phase Schuko
Capacity 8 trays	600x400
Distance between trays	80 mm.





STF 610

PVP 2.197 €





Reference	710626
Internal dimensions	(W)720 x (D)850 x (H)425 mm
External dimensions	(W)880 x (D)950 x (H)690 mm
 Electric power	1.400 W
 Maximum temperature	85° C
 Weight	60 Kg.
 Voltage	230 V - 50/60 Hz
Connection	Single phase Schuko
Capacity 10/5 trays	600x400 / 600x800
Distance between trays	80 mm.

- 3/4" Water connection
- Water tank fill up button
- Compatible with ST Bakery dimensions



STF 620

PVP 2.540 €

Reference	710606
Internal dimensions	(W)720 x (D)850 x (H)825 mm
External dimensions	(W)880 x (D)950 x (H)1090 mm
 Electric power	1.400 W
 Maximum temperature	85° C
 Weight	80 Kg.
 Voltage	230 V - 50/60 Hz
Connection	Single phase Schuko
Capacity 20/10 trays	600x400 / 600x800
Distance between trays	80 mm.





- 3/4" Water connection
- Water tank fill up button
- Compatible with ST Bakery dimensions





STF 433

PVP 2.500 €





Reference	710769
Internal dimensions	(W)720 x (D)885 x (H)425 mm
External dimensions	(W)1090 x (D)985 x (H)690 mm
 Electric power	1.400 W
 Maximum temperature	85° C
 Weight	80 Kg.
 Voltage	230 V - 50/60 Hz
Connection	Single phase Schuko
Capacity 10/5 trays	600x400 / 600x800
Distance between trays	80 mm.
Superpositon kit STF/STZ 433	Ref. 710796

- 3/4" Water connection
- Water tank fill up button
- Compatible with STP 642



STF 633

PVP 3.230 €

Reference	7710770
Internal dimensions	(W)1335 x (D)885 x (H)425 mm
External dimensions	(W)1500 x (D)985 x (H)690 mm
 Electric power	2.100 W
 Maximum temperature	85° C
 Weight	105 Kg.
 Voltage	230 V - 50/60 Hz
Connection	Single phase Schuko
Capacity 10/5 trays	600x400 / 600x800+600x400
Distance between trays	80 mm.
Superpositon kit STF/STZ 633	Ref. 710797




- 3/4" Water connection
- Water tank fill up button
- Compatible with STP 643







ACCESSORIES



<u>TROLLEY</u>	<u>MODEL REFERENCE</u>	<u>DIMENSIONS</u>	<u>COMPATIBLE MODELS</u>	<u>N. GUIDES</u>	<u>PRICE</u>
	TROLLEY 20 GN 1/1 <i>Ref. 710403</i>	(W)440 x (D)540 x (H)1700 mm	COMPACT GASTRO	20	635 €
	TROLLEY 20 GN 2/1 <i>Ref. 710408</i>	(W)640 x (D)660 x (H)1700 mm	COMPACT GASTRO	20	920 €
	TROLLEY ST20 GN 1/1 <i>Ref. 710347</i>	(W)760 x (D)595 x (H)1765 mm	201 ET / 201 V7 T 201 V7 T GAS	20	2.530 €
	TROLLEY ST20 GN 2/1 <i>Ref. 710348</i>	(W)760 x (D)765 x (H)1765 mm	202 V7 T 202 V7 T GAS	20	3.180 €
	PLATE TROLLEY GN 1/1 <i>Ref. 710429</i>	(W)760 x (D)595 x (H)1765 mm	201 ET / 201 V7 T 201 V7 T GAS	60 PLATES	3.570 €
	PLATE TROLLEY GN 2/1 <i>Ref. 710430</i>	(W)760 x (D)765 x (H)1765 mm	202 V7 T 202 V7 T GAS	100 PLATES	4.670 €

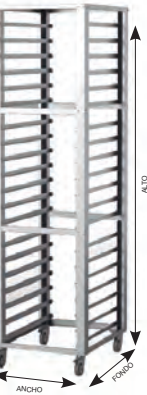

<u>TROLLEY</u>	<u>MODEL REFERENCE</u>	<u>DIMENSIONS</u>	<u>COMPATIBLE MODELS</u>	<u>N. GUIDES</u>	<u>PRICE</u>
	TROLLEY 10B 600/400 <i>Ref. 710097</i>	(W)515 x (D)620 x (H)1015 mm	603/604/604 PLUS BAKERY PASTRY	10	530 €
	TROLLEY 10B 480/340 <i>Ref. 710099</i>	(W)455 x (D)500 x (H)1015 mm	424	10	495 €
	TROLLEY 20B 480/340 <i>Ref. 710098</i>	(W)455 x (D)500 x (H)1860 mm	424	20	630 €
	TROLLEY 20B 600/400 <i>Ref. 710095</i>	(W)515 x (D)620 x (H)1860 mm	603/604/604 PLUS BAKERY PASTRY	20	700 €
	TROLLEY 20B 800/600 <i>Ref. 710624</i>	(W)710 x (D)820 x (H)1860 mm	BAKERY	20	970 €

	TROLLEY ST16 600/400 <i>Ref. 710346</i>	(W)760 x (D)595 x (H)1730 mm	616 E T / 616 V7 T 616 V7 T GAS	16	2.550 €
	TROLLEY ST18 800/600 <i>Ref. 710625</i>	(W)760 x (D)895 x (H)1730 mm	18/86 V7 T 18/86 V7 T GAS	18	3.180 €




**STAINLESS STEEL
CONTAINER GN 2/3**

REF.	DIMENSION	
840H10	H20	32 €
840H11	H40	42 €
840H12	H65	48 €




**STAINLESS STEEL CONTAINER
PERFORATED GN 2/3**

REF.	DIMENSION	
840H19	H20	50 €
840H20	H40	55 €
840H21	H65	66 €

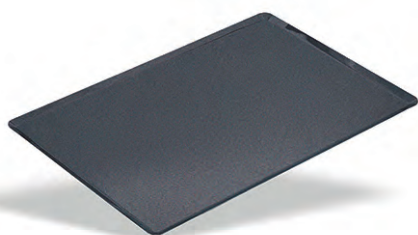

**NON-STICK
ALUMINIUM FLAT TRAY**

REF.	DIMENSION	
810H17	GN 2/3	70 €

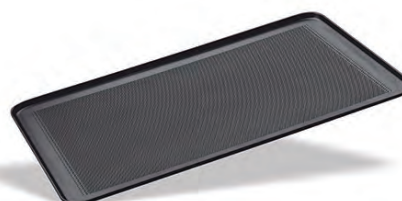

**NON-STICK ALUMINIUM
PERFORATED TRAY**

REF.	DIMENSION	
810H18	GN 2/3	70 €




BAKING AND ROASTING PAN

REF.	DIMENSION	
840H32	20 cm.	65 €




INOX WIRE RACK

REF.	DIMENSION	
840H25	GN 2/1	65 €
840H26	GN 1/1	35 €

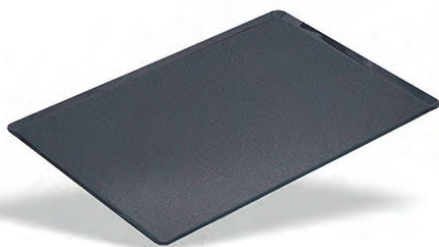


**NON-STICK ALUMINIUM
FLAT TRAY**

REF.	DIMENSION	
810H14	GN 1/1	84 €

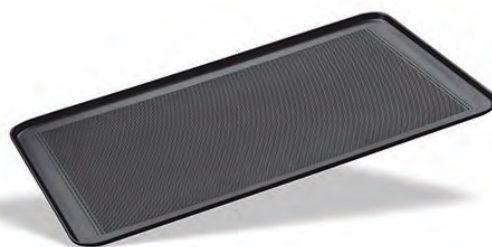

**NON-STICK ALUMINIUM
PERFORATED TRAY**

REF.	DIMENSION	
810H15	GN 1/1	84 €

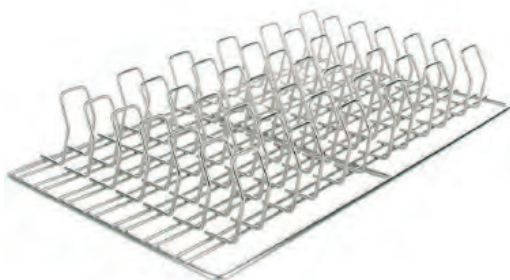


RIBS TRAY

REF.	DIMENSION	
840H40	GN 1/1	145 €



FRYING TRAY

REF.	DIMENSION	
840H34	GN 1/1	210 €

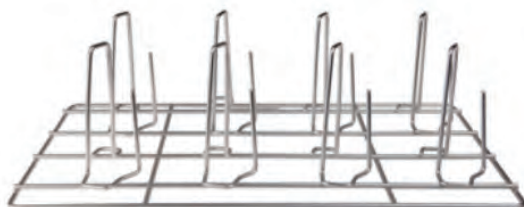


CHICKEN ROASTING TRAY

REF.	DIMENSION	
840H39	GN 1/1	105 €




EGG TRAY GN

REF.	DIMENSION	
840H28	GN 1/1	150 €

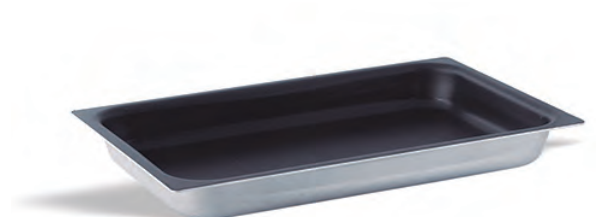

NON-STICK ALUMINUM TRAY GN D 65 mm.

REF.	DIMENSION	
840H29	GN 1/1	209 €

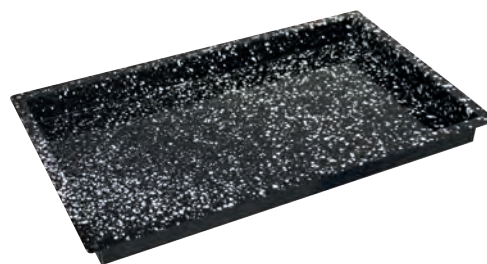

GRANITE CONTAINER GN D 40 mm

REF.	DIMENSION	
840H36	GN 1/1	128 €



NON-STICK GRILL FLAT TRAY GN 1/1

REF.	DIMENSION	
840H03	GN 1/1	226 €



NON-STICK GRILL GN 1/1

REF.	DIMENSION	
840H37	GN 1/1	220 €



EXTERNAL SHOWER



REF.	SERIE	
710310	STC/STG/STB	170 €

AUTOMATIC WASHING



REF.	SERIE	
710141	STB	954 €
710356	ST 200	1.595 €

Ovens INSTALLATION KIT



REF.	SERIE	
710434	STC/STG/STB	260 €
710709	TROLLEY OVENS	260 €

HOOD/FUMES CONDENSER INSTALLATION KIT



REF.	SERIE	
710671	STC/STG/STB/STZ	180 €
710710	STC/STG/STB/STZ DUO	300 €

CORE PROBE



	Ref.	
VACUUM	710376	305 €
MULTIPOINT	710620	220 €



With the determination and tenacity that characterises the group of individuals known collectively as **FM company** together with the dream of continuous process of growth and expansion Internationally, FM brand has extended its influence deeper into the international market place, covering at present in 58 countries worldwide.

Our success in the International market is also thanks to our presence and collaboration at international trade fairs and in house exhibitions which allows us to introduce our innovations, technological improvements and developments and new designs according to the market trends.

FM company participates in some of the most influential and recognised trade fairs all over the world such as the following:



International Department:

Fran Martos (Export Manager)

 Ctra. de Rute, km. 2,700

14900 Lucena (Córdoba) Spain

 M. +34 650 031 808

 fmartos@fmindustrial.es



SPECIFICATIONS




<i>Recipe book with six cooking stages per program.</i>
<i>Multicook / Multilevel - multitray processing scheduled completion.</i>
<i>All on time - simultaneous multitray termination.</i>
<i>HACCP Register with USB Connection.</i>
<i>0-120 minutes manual timer and continuous mode.</i>
<i>Manual control.</i>
<i>Manual control with display.</i>
<i>Touchscreen control.</i>
<i>Double speed fans 50% and 100 %.</i>
<i>Turbine speed adjustable in percentages from 10% to 100%.</i>
<i>Adjustable humidity percentage 0 to 100%.</i>
<i>Humidity adjustable by seconds.</i>
<i>Automatic washing (5 levels) using detergent and rinse aid.</i>
<i>Three cooking modes, dry heat, steam and mixed cooking, convection + steam.</i>
<i>Wifi connection (optional)</i>
<i>Planning.</i>
<i>Sous vide cooking mode</i>
<i>Preset recipe book as default, editable and with images.</i>
<i>Visual and acoustic end-of-cooking alarm.</i>
<i>Core Probe.</i>
<i>Delta T cooking mode</i>
<i>End of cycle alarm.</i>
<i>Three preheating modes.</i>
<i>Programming of temperature, humidity and cooking times.</i>
<i>Programming of the vapour outlet of the cooking chamber.</i>
<i>Direct vaporization by push button.</i>
<ul style="list-style-type: none"> ● Standard ● Optional on request ○ Not available

NOTES



fm

NOTES

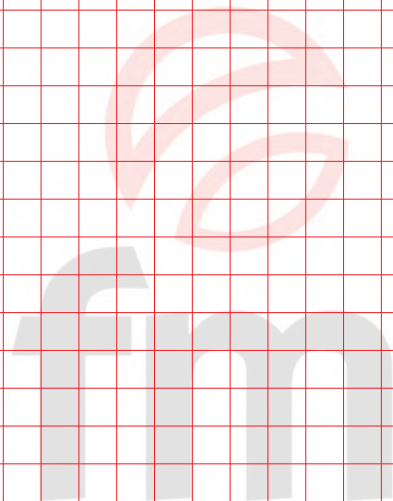



14900 LUCENA (Córdoba)
Apdo. de correos 98
SPAIN

Tel.: (0034) 957 511 101
e-mail: fmindustrial@fmindustrial.es

www.fmindustrial.es

ΒΙ.Π.Ε. Μεγάρων, 19100 Μέγαρα, ΤΗλ 22960 80086 - 80087 email: sales@moraitis.gr
www.moraitis.gr